


Request for Class Rule Interpretations from GBR NCA concerning the combining of functions in a fitting under the main boom

Question 1)

Is the fitting hanging below the main boom and described by the owner as 'kicker/mainsheet/outhaul fitting' permitted?

Question 2)


Is the vertical fitting rotating about the gooseneck and kicking strap mast fittings described by the owner as 'gooseneck/kicker/cunningham/jackstay fitting' permitted?

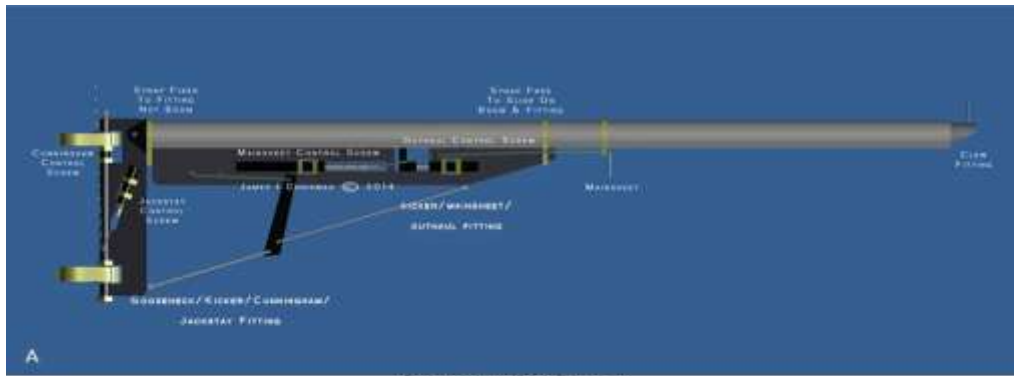

Gooseneck_Lever-Kicker_Fittings-a.jpg



Gooseneck_Screw-Kicker_Fittings-b.jpg

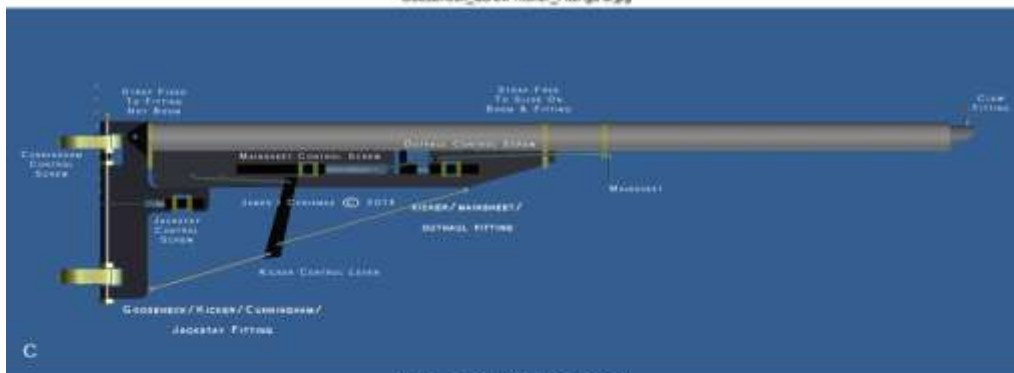

Gooseneck_Lever-Kicker_Fittings-c.jpg



Gooseneck_Screw-Kicker_Fittings-d.jpg